



IVECO T-WAY

DRIVE THE NEW WAY



ROBUST RELIABILITY

The cab has been entirely redesigned focusing on functionality to facilitate the driver's daily work with features that improve visibility, protect from dirt and much more.

The chassis layout has been entirely reviewed to facilitate the customization of bodybuilders. The new Cursor 13 litres Common Rail engine with different engine ratings from 430 to 480 HP to suit all the applications and deliver class leading power. HI-Tronix gearbox with off-road functionalities, you can benefit from a host functionalities such as Rocking Mode, Off Road Mode, Creeping Mode to tackle with ease the toughest off-road conditions.

The IVECO T-Way is a highly versatile vehicle, high payload, kerb weight optimization and wide offering features and components.



ENGINE

The line-up offers the new Cursor 13 litres Common Rail engine with various ratings from 430 to 480 HP to suit all the applications and deliver class leading power and torque for your mission.



TRANSMISSION

Best transmission for off road use, maximize comfort and safety while reducing operating cost



SUSPENSION


The IVECO T-WAY offers choices of front and rear suspensions (parabolic, reinforced, multi-leaf) in combination with all configurations to optimize stability and robustness in all conditions.



HIGH VERSATILITY TO MATCH YOUR MISSION


The IVECO T-WAY is the vehicle you want for the toughest missions in the most extreme conditions. With its perfect combination of robustness, reliability and comfort, it is designed to meet your requirements and exceed all your expectations on productivity, payload capacity and safety.

With legendary robustness of its chassis and components, it is built to perform extreme off-road missions. The most reliable and productive heavy-duty truck in a mining & construction environment, the IVECO T-WAY is truly unstoppable and equal to the toughest challenges.

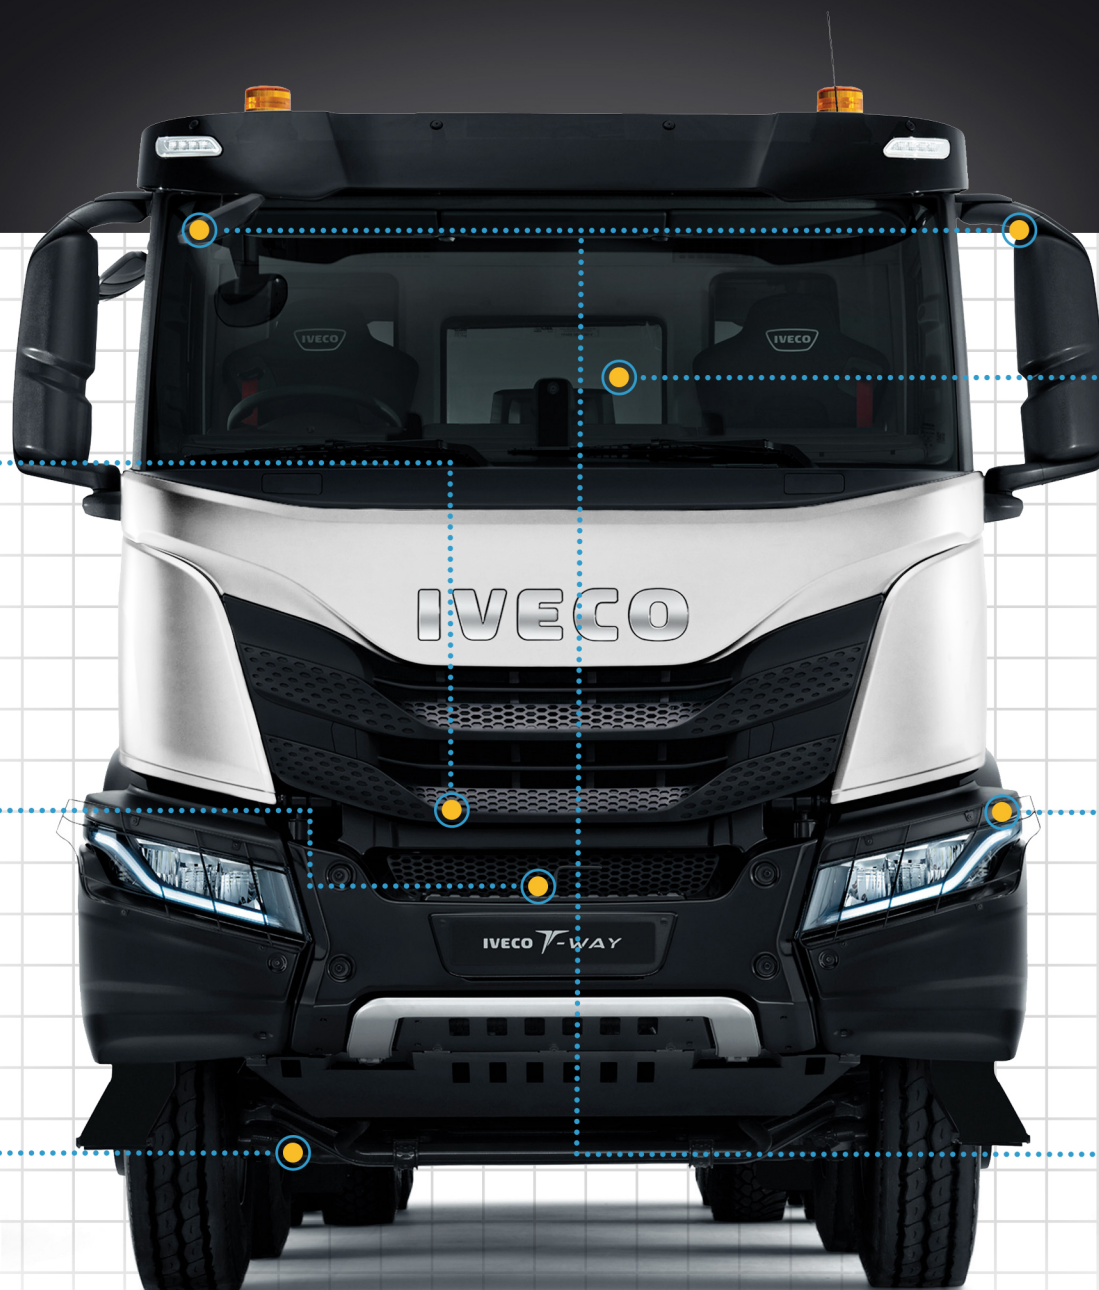

SAFEGUARDING THE VALUE OF YOUR IVECO TRUCKS

Genuine parts for high performance, represent the best guarantee of the value of IVECO T-WAY over time, protecting from unplanned downtime, increase uptime, ensuring safety for people and operations. IVECO also offers the widest range of new and remanufactured components, preventive maintenance kits, genuine oil, suitable for every stage of the IVECO T-WAY's lifecycle. Chakra Jawara operates network of warehouses across Indonesia to ensure high parts availability.

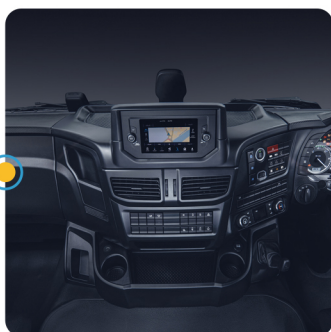

FUTURISTIC CABIN

The IVECO T-WAY raises the drivers on board experiences to a new level with new cab design around their needs. The entire driver area has been created to provide the ultimate driving environment with outstanding ergonomics and controls layout, spacious and excellent visibility.



NEW HEADLIGHT DESIGN


With LED DRL, keep the daytime running lights on all time to ensure the maximum visibility of the vehicle.



VISIBILITY

The aerodynamic design of the mirrors and their optimized positioning further improves visibility. The rear window of the AD/AT cabs provides excellent visibility on the rear of the vehicle.


SPECIFICATION DETAILS

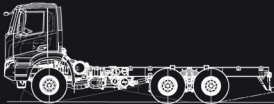

TECHNICAL SPECIFICATION		IVECO AD380T43H 6X4 RIGID	IVECO AD380T48WH 6X6 RIGID	IVECO AD410T48H 8X4 RIGID	IVECO AT720T48TH 6X4 TRACTOR HEAD			
DIMENSION								
Wheelbase	mm	4200	4500	5820	3500			
Front Overhang	mm	1440	1440	1440	1440			
Rear Overhang	mm	1135	2075	1225	785			
Overall Width	mm	2500	2500	2500	2500			
Overall Length	mm	8155	9405	9865	7105			
ENGINE								
Model		CURSOR 13	CURSOR 13	CURSOR 13	CURSOR 13			
Type		Diesel 4 stroke, 6 In-line cylinder Common-rail Turbocharge Intercooler	Diesel 4 stroke, 6 In-line cylinder Common-rail Turbocharge Intercooler	Diesel 4 stroke, 6 In-line cylinder Common-rail Turbocharge Intercooler	Diesel 4 stroke, 6 In-line cylinder Common-rail Turbocharge Intercooler			
Displacement	cc	12880	12880	12880	12880			
Bore x Stroke	mm	135 x 150	135 x 150	135 x 150	135 x 150			
Power	HP	430	480	480	480			
Torque	Nm	2100	2200	2200	2200			
TRANSMISSION								
Model		ZF TRAXON 16TX2240 TO	ZF TRAXON 16TX2240 TO	ZF TRAXON 16TX2240 TO	ZF TRAXON 16TX2240 TO			
Speed		16-Speed forward; 2-Speed reverse	16-Speed forward; 2-Speed reverse	16-Speed forward; 2-Speed reverse	16-Speed forward; 2-Speed reverse			
Ratio		14.68 - 0.82	14.68 - 0.82	14.68 - 0.82	14.68 - 0.82			
TRANSFER CASE								
Model		-	TC 2200	-	-			
Ratio (normal/low)		-	1:1 / 1:1.6	-	-			
PTO								
Provision	Engine (opt)	Transmission (std)	Engine (std)	Transmission (opt)	Engine (opt)	Transmission (std)	-	Transmission (opt)
AXLE								
Front Axle Capacity	kg	10000	10000	2x 10000	9000			
Rear Axle Capacity	kg	38000	38000	38000	32000			
Rear Axle Ratio		6.57	6.57	6.57	6.57			
SUSPENSION								
Front Axle		Semi-elliptic spring	Semi-elliptic spring	Parabolic spring	Parabolic spring			
Rear Axle		Semi-elliptic spring	Semi-elliptic spring	Semi-elliptic spring	Semi-elliptic spring			
WHEEL & TIRES								
Wheel		Disk 8.5" x 24"	Disk 8.5" x 24"	Disk 8.5" x 24"	Disk 8.5" x 24"			
Tires		325/95 R24	325/95 R24	325/95 R24	325/95 R24			
FIFTH WHEEL								
Model		-	-	-	3.5" Single Oscillating			
WEIGHT								
Kerb weight at Front	kg	5246	5740	7045	5783			
Kerb weight at Rear	kg	4148	4760	3719	4927			
Total kerb weight	kg	9430	10500	10764	10710			
GVW	kg	41000 - 50000	41000 - 50000	50000 - 58000	-			
GCW	kg	-	-	-	150000			

*Specification may or may not change without prior notice

IVECO *T*-WAY

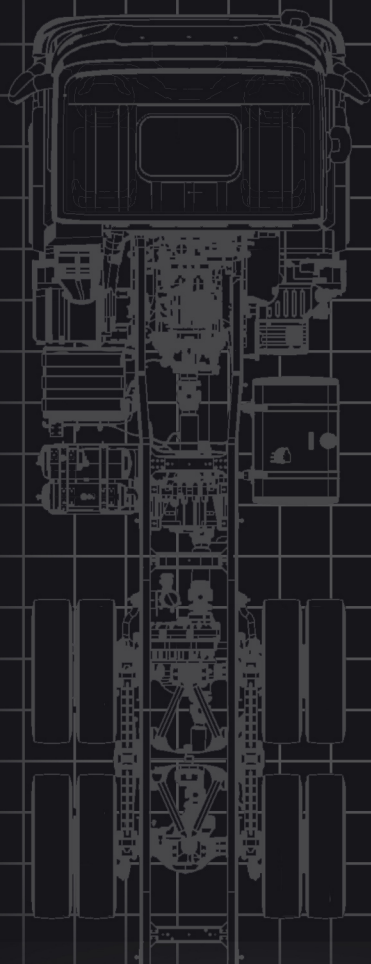

Chakra Jawara

Gedung TMT 1,
3rd Floor, Suite 301
Jl. Cilandak KKO No. 1
Jakarta 12560

Phone : +62 21 2997 6849

Fax : +62 21 2997 6850

 info@chakrajawara.co.id

 www.chakrajawara.co.id

 iveco.indonesia